
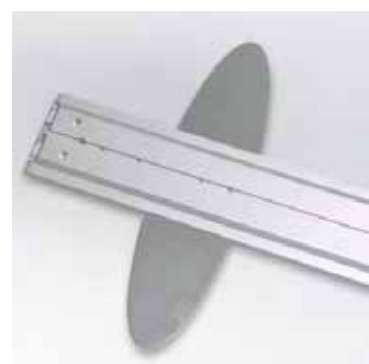


LUMIWALL LED Backlit fabric display

LUMIWALL is constructed of aluminum extrusion and features SEG press fit fabric graphics for hassle free set up. Heavy duty aluminum feet ensure maximum stability. Graphics are printed on premium fabric designed to provide maximum illumination while maintaining vibrant colors. The entire unit disassembles and packs flat in a single wheeled rotomolded case for unparalleled protection.

MODEL #: LW-33



Details

- Aluminum Extrusion Frame
- Single or double-sided SEG press fit dye-sublimated fabric graphics
- Easy assembly
- Packs in a single 4825 rotomolded wheeled, flat transport case
- Limited Lifetime Warranty
- Made in the USA


Includes

- 3' x 3' Lumiwall Frame
- Lumiwall Stabilizer Feet
- Backlit Front Fabric
- White Backing Fabric
- LED Backlighting Kit (800 Lumens, 6500k Daylight White)
- Lumiwall Tool Kit
- Rotomolded Case

Dimensions

Assembled unit:
36"w x 36"h x 17.5"d
40 lbs / 18.1 kgS

Graphic area:
35 13/16"w x 35 13/16"h

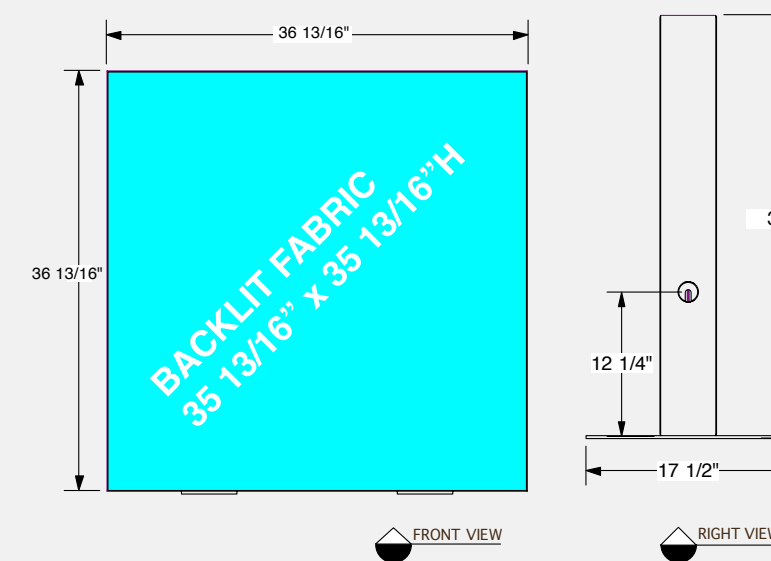

Additional information

Power/Wattage Requirements: 40w
Set-Up Time: 15-20min
Lead Time: 10 Days
Warranty: Limited Lifetime Warranty

Shipping




Packs in (1) 4325-LW33 case
Shipping dimensions:
40"h x 27"w x 5"d
1016mm x 685mm x 127mm
40 lbs / 18.4 kgS

LW-33 PACKAGE CONTENTS

Profile	Label	#	Description
	001	2	1/4" ALUMINIUM OVAL BASE PLATE 17.5" (444.5MM) x 4.72" (120MM)
	002	1	M1901 36" (914.4MM) EXTRUSION W/ (2) 45° CUTS, (4) HOLES FOR BASE PLATE & LIGHTS
	003	1	M1901 36" (914.4MM) EXTRUSION W/ (2) 45° CUTS
	004	1	M1901 36" (914.4MM) EXTRUSION W/ (2) 45° CUTS & POWER SUPPLY
	005	1	M1901 36" (914.4MM) EXTRUSION W/ (2) 45° CUTS & LIGHTS
		8	Z966 90° CORNER INTERNAL CONNECTOR
		4	5/16-18 FLAT HEAD SCREW 0.75" LONG FOR BASE PLATES
		2	35.5"W (908MM) x 35.5"H (908MM) SINGLE SIDED DYESUB GRAPHIC W/ SEG WELT ALL 4 SIDES

2. GRAPHIC


Insert the silicon edge of the fabric into the groove of the extrusions.



Start on the corners, then centers and work your way to corners from center on both directions.

To pull fabric graphic out of extrusion groove, use pull tab on corner

Step 1.




Loosen the screws on base plate but do not remove them. Then swivel base plates.


Step 2.



Tighten both screw firmly.


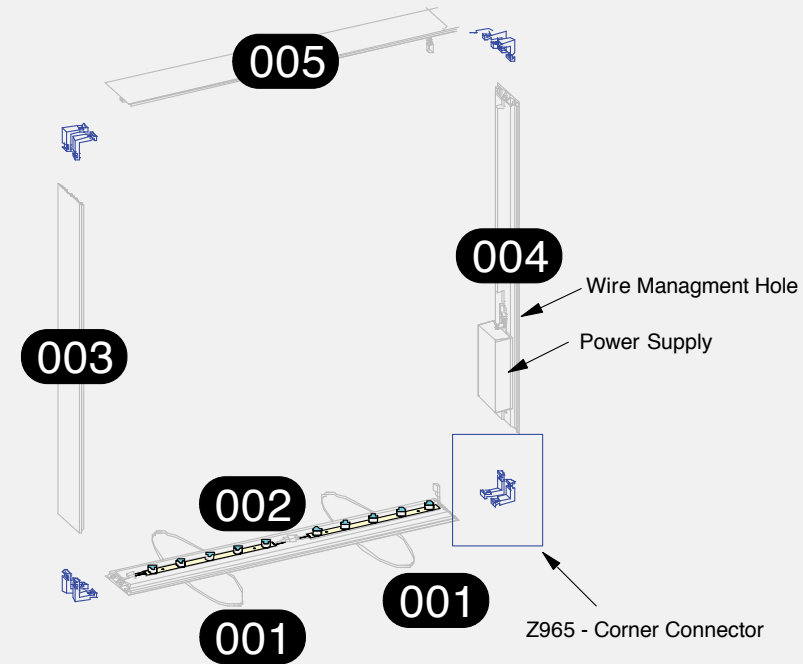


Step 3.



1. Slide corner connectors (Z965) into both sides of horizontal extrusions. Turn each screw enough to hold connector in place.
2. Slide vertical extrusions onto corner connectors of top horizontal extrusion. Turn each screw enough to hold connector in place.
3. Finish frame assembly by sliding corner connectors of bottom horizontal extrusion on to vertical extrusions and tighten the screws to secure frame extrusions together.

3. LIGHT ASSEMBLY

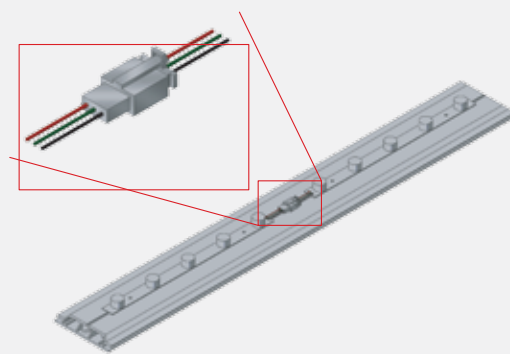


Lights come attached to extrusions. Ensure all lighting strips are connected. Once frame is assembled, connect strip-to-power cords to the end of top and bottom lights chain.

- For bottom lights connect strip-to-power cord to power supply directly.
- For top lights connect extension cord to strip-to-power cord and run with wire management extrusion then connect to power supply.


Run AC power cord out through grommet hole on vertical upright and connect to power outlet.
To remove or re-attach light strips use provided thumbscrews with plate

4. WALL MOUNT (Optional)

Attach wall bracket to top extrusion groove with provided hammerhead screw. Locate position of wall bracket on extrusion (preferably by wood stud) by sliding the bracket on the extrusion and tighten it. Secure the frame to the wall with provided wood screw.



PACKING DIAGRAM

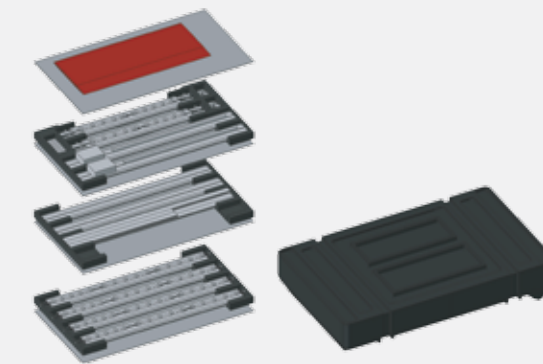





10x8



8x8

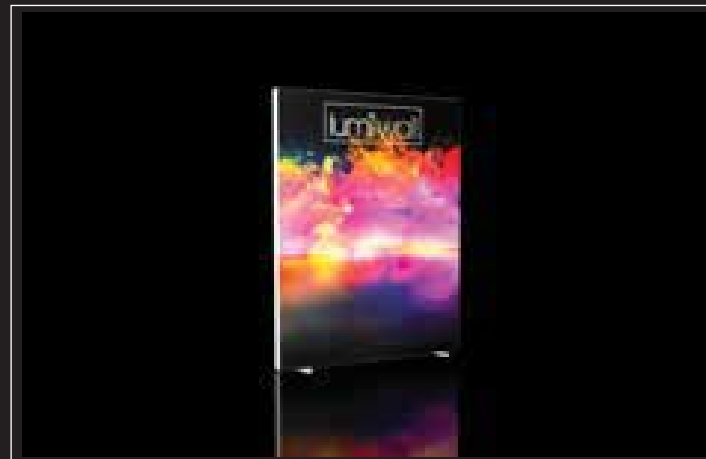


6x8

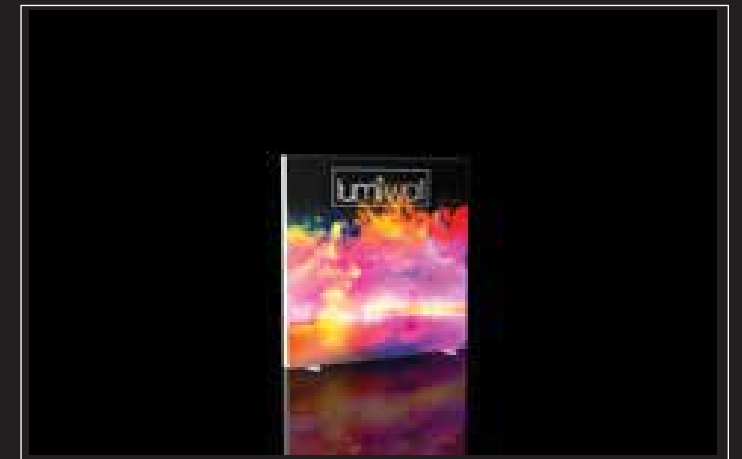


6x6



4x8

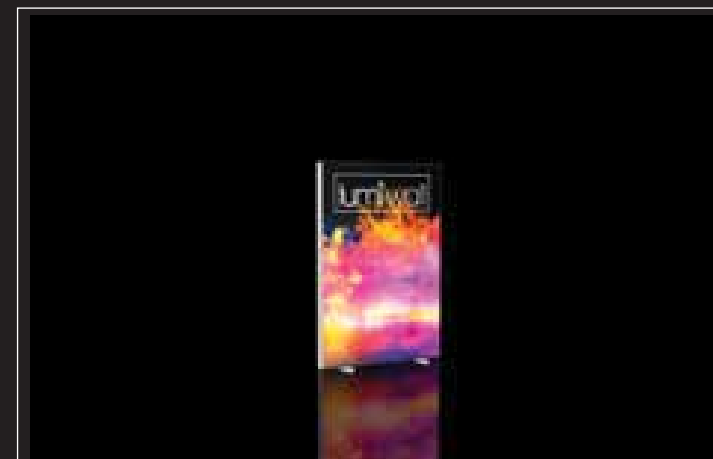

4x6

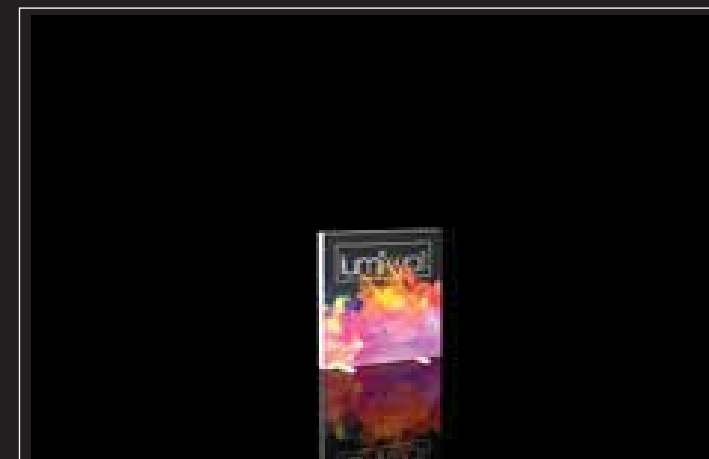


4x4




3x8



3x6

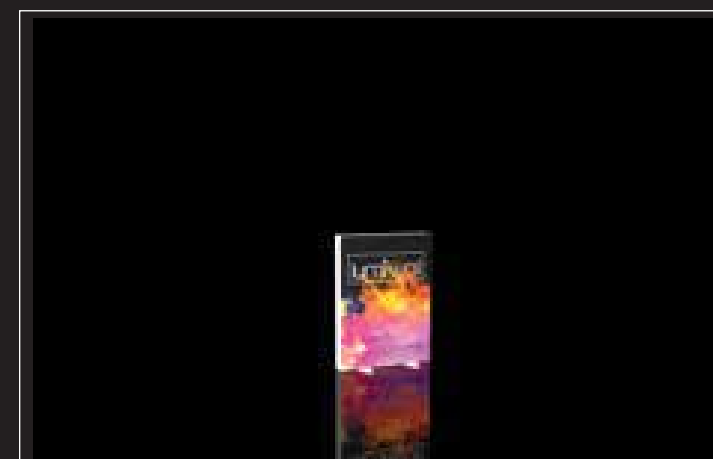

3x4

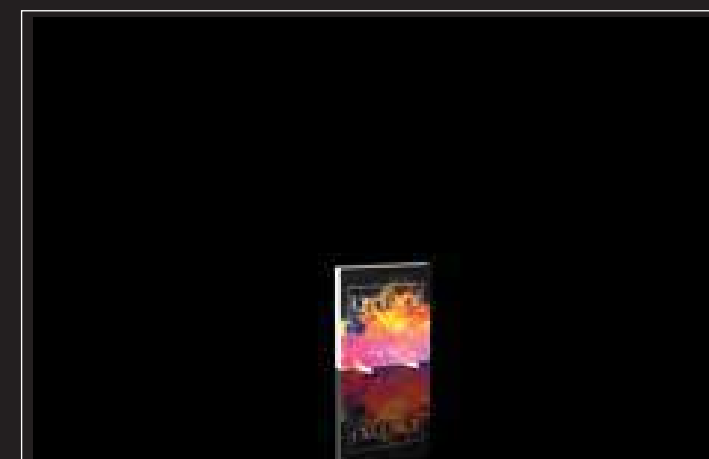

3x3