


## **Basic Monitor Mount Setup WLM-Mount-B**



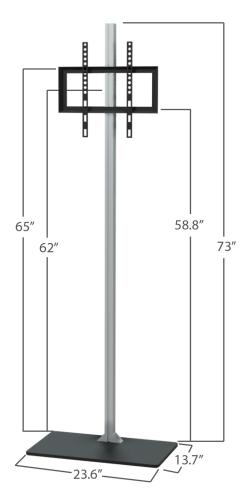

### **Description**

Designed to fit any Waveline Display, these mounts achieve a "floating" screen experience. Simply slide the mount behind the display, and attach your screen on the front. Graphics can include a cut-out for easy access, or you can do your own cut as needed. Kit includes wooden base plate, aluminum post and mount.

#### **Dimensions**

Product Weight: 14lbs Shipping Weight: 17.5lbs


Assembled Size: 23.6"w x 73"h x 13.7"d Box Dimensions: 39" x 15" x 5"

#### **Monitor Specifications**

Holds Monitors up to 43" or 30 lbs

Up to VESA 400x400

#### **Parts**






Base





# **Basic Monitor Mount Setup WLM-Mount-B**



Secure the poles to the base using screw **A** 



Attach the triangular supports to sides of poles, using **A** screws, **B** gasket and C nuts.



Secure screws with Allen wrench



Attach caps to triangular supports




Connect the pole extension using allen key to secure connector insert




Attach the Mount Plate to the pole, use Phililps **E** screw




Place the Monitor Stand behind your display, slide the base forward



Mount the brackets to the back of the monitor with 4 **F** screws



Slowly hang the Bracket onto the Monitor Plate through the opening on the graphic



Secure the bracket to the Monitor Plate by tightening the safety screws **D** 



Enjoy your display!